

Wide-Band Coupler

Features:

Low insertion loss
High Efficiency
stability and reliability


Application:

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Parameter	Value	Unit	Note
Center wavelength	1310	nm	
Operating bandwidth	± 20	nm	
Configuration	1x3		
Coupling ratio	EVEN		
IL	≤ 6.0	dB	
PDL	≤ 0.25	dB	
Directivit	≥ 55	dB	
Package size ($\Phi \times L$)	2.4x25	mm	
Fiber type	长飞 RC1310 80-21/165, 250um bare fiber		
Operating Temperature	-45~85	℃	
Storage Temperature	-45~85	℃	
Fiber length	1.0	m	

Note: The above specification is without connector.

Mechanical Dimension

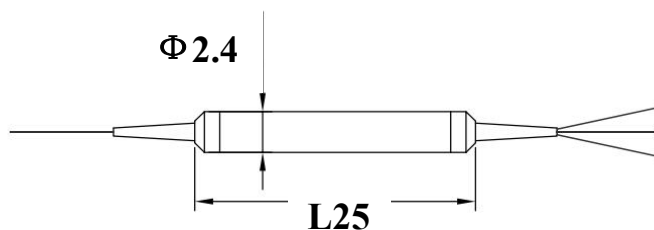

Ordering Information

GCWBC-O-1x3-1310-EVEN-0-01-2.4x25-1m