

MFA+Cladding Power Stripper

Features


Low insertion loss
High Efficiency
stability and reliability

Application

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	MFA+CPS	-	
Direction	Forward/Backward	-	
Pump Wavelength	800-2000	nm	
Signal Wavelength	1550	nm	
Input Fiber	PM12/130 DCF 0.2/0.46NA	μm	
Output Fiber	PM1550	μm	
Signal Insertion Loss	0.3	dB	
Stripping Efficiency	20	dB	
Signal Output Beam M ²	1.2	-	Input Signal M ² ≤1.05
Pump Power Handling	10	W	
ER	-	dB	
Operating Temperature	-20-+70	℃	
Operating Humidity	5-95	%RH	
Storage Temperature	-40-+85	℃	
Fiber Length	1.0	m	
Dimensions	70x12x8	mm	

Mechanical Dimension

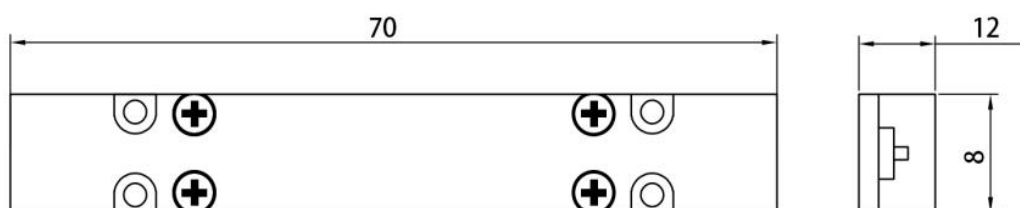

Ordering Information

GCPMMFA+CPS-1x1-1550-10W-70x12x8-1.0m