

Reflector

Features

Compact size
Low insertion loss


Applications

EDFA
WDM system
Fiber sensors
CATV system

Parameter	Values	Unit
Operating wavelength	1550	nm
Operating bandwidth	±20	nm
Insertion loss	≤0.4	dB
PDL	-	dB
PMD	-	ps
Max power handling	300	mW
Operating temperature	-5 ~ +70	°C
Storage temperature	-40~ +85	°C
Fiber type	Corning-SMF-28(R)-Ultra	
Package dimensions	Φ3.5×L15	mm

*The Above specifications are without connector.

Mechanical Dimension

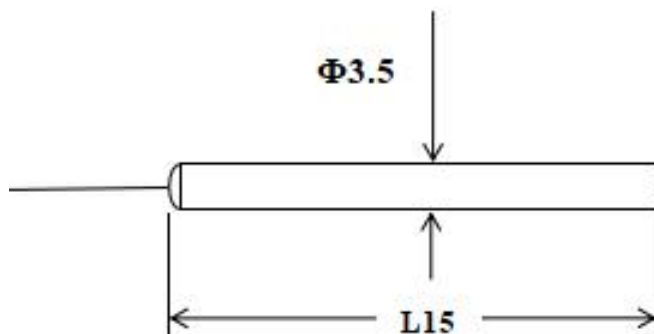

Ordering Information

GCRF-1550-0-300mW-Φ3.5×15-1m